

Balcony Solar System



Key Features

Lightweight

Optimized composite materials, 60% lighter at the same power

Flexible

Special manufacturing process and materials provide bending ability

Excellent Appearance and Performance

Esthetics module design, no flare effect, "0" risk of micro crack

Easy transportation and installation

Original design making it far less costly for transportation and installation

Customization

Customization for various scenarios, high additional value


Superior Low Irradiance Performance

Excellent low irradiance performance, increase power generation in low-light conditions like mornings, evenings and cloudy days

Quality system: ISO 9001: 2005



Linear Performance Warranty

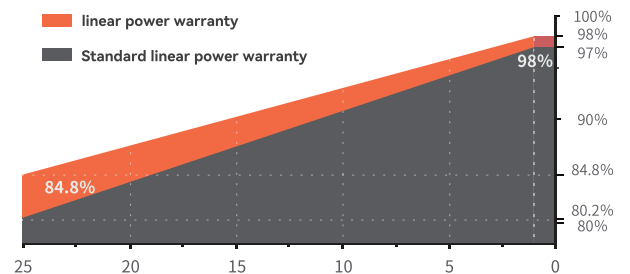


Leading product and power warranty

12 Materials and workmanship warranty

25 Linear power warranty


STEP 1

Fix the solar panel with strap to the balcony

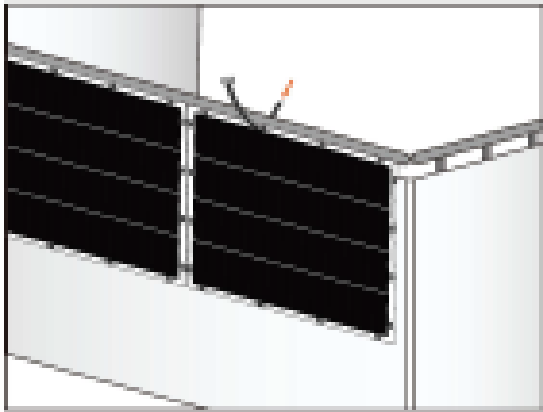


STEP 2

Follow the first step, fix all the solar panels

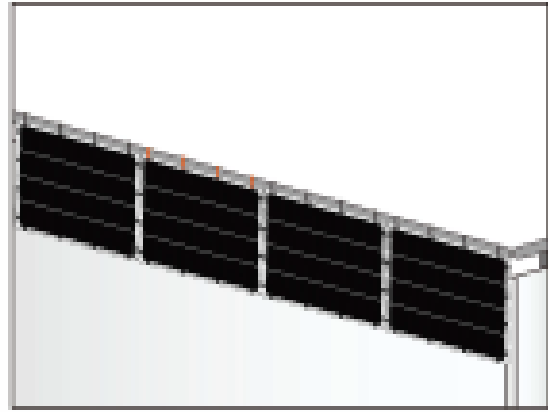


STEP 3

Connect micro-inverter

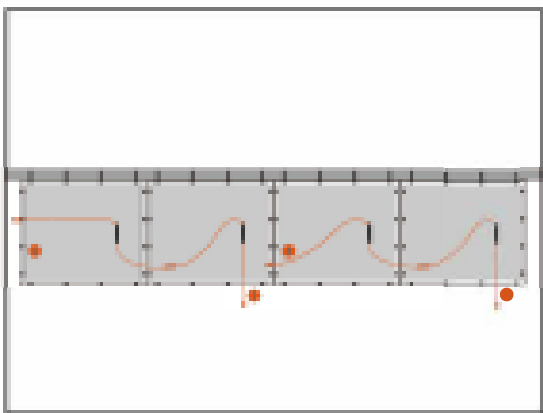

STEP 4

Connect extension cable and plug in power supply

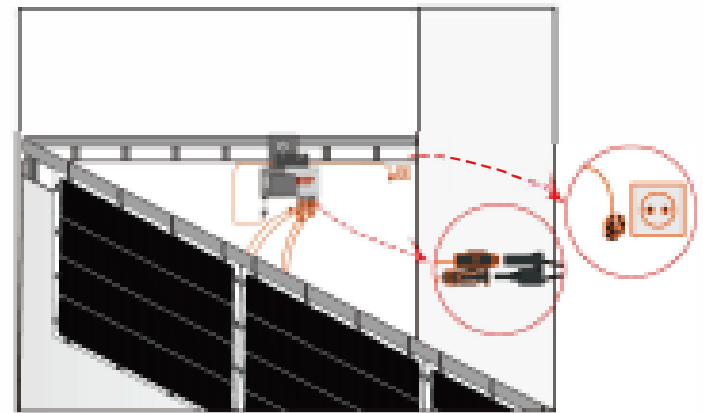

Solar panel


ELECTRICAL CHARACTERISTICS

STC	PURES-210-F6MG
Maximum Power (P_{max})	210W
Maximum Power Voltage (V_{mp})	16.2V
Maximum Power Current (I_{mp})	13.06A
Open-circuit Voltage (V_{oc})	19.4V
Short-circuit Current (I_{sc})	13.72A
Module Efficiency (%)	19.26%
Operating Temperature	-40°C to 85 °C
Maximum System Voltage	600VDC
Maximum Series Fuse Rating	15A
Application Class	Class A
Power Tolerance	0~+5W

STC: Irradiance 1.000W/m², module temperature 25°C, AM=1.5

MECHANICAL CHARACTERISTICS

Solar Cell	Monocrystalline silicon cell
No. of cells	56
Installation Module Dimension	L:1380*W:790*H:18mm
Weight	3.3kg
Backsheet	White PV Backsheet
J-Box	IP 67 rated
Output cables	4mm ²
Connector	MC4 compatible

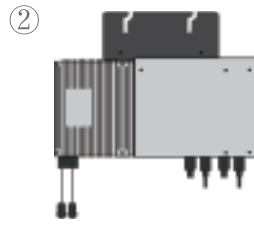

Component

- ① Flexible Solar Panel*4
- ② Micro-inverter*1
- ③ AC Cable*1
- ④ PV Cable 4m*4
- ⑤ Fixing strap*40

Packaging(4 pieces/set)

Container	20'GP	40'HQ
Sets per pallet	33	37
Sets per container	198	481

Micro-inverter

BDM-600

Input | DC

Max Recommended PV Power (Wp)	450 x 2
Max DC Open Circuit Voltage (Vdc)	60
Max DC Input Current (Adc)	14 x 2
MPPT Tracking Accuracy	>99.5%
MPPT Tracking Range (Vdc)	22 - 55
Isc PV (absolute maximum) (Adc)	18 x 2
Maximum Inverter Backfeed Current to the Array (Adc)	0

Output | AC

Max AC Output Power (Wp)	600		
Nominal Power Grid Voltage (Vac)	240	208	230
Allowable Power Grid Voltage (Vac)	211-264	183-229	Configurable
Allowable Power Grid Frequency (Hz)	59.3 - 60.5		Configurable
THD	<3% at rated power		
Power Factor (cos phi, fixed)	>0.99 at rated power		
Rated Output Current (Aac)	2.50	2.88	2.61
Current (inrush, peak and duration)	24A, 15us		
Nominal Frequency (Hz)	60	60	50
Maximum Output Fault Current (Aac)	4.6A peak		
Maximum Output Overcurrent Protection (Aac)	10		
Maximum Number of Units per Branch (20A) All NEC adjustment factors have been considered	7	6	6

System Efficiency

Weighted Averaged Efficiency (CEC)	96.50%
Night Time Rate Loss (Wp)	0.11